

6-GFM-120Ah Valve-regulated Lead Acid Battery Specification

We are an ISO9001 certified organization. And the products are approved by CE & UL. The nominal voltage of this series is 12V. And the capacity ranges from 33Ah to 250Ah. Their typical applications include: emergency lighting systems, electricity power supply systems, communication systems, UPS systems, starting systems, solar systems etc.

Battery Construction		General Features
Component	Material	Maintenance free
Positive plate	Lead dioxide	Convenient for installation
Negative plate	Lead	Safety and no leakage
Container	ABS	Excellent recharge and discharge performance
Cover	ABS	Low self-discharge rate, charge each standby 6 months, temperature 25℃
Safety valve	Rubber	Adapt to high or low temperature
Terminal	Copper	Good deep discharge performance
Separator	AGM glass	Longer cycle life
Electrolyte	Sulfuric acid	UL approval

Performance Characteristics

1.Dimension and weight

Length	406mm
Width	173mm
Height	210mm
Total Height	236mm
Reference Weight	33kg

2.Functional Parameter

Rated Voltage	12V
Numbers of cells	6 Cells
Designed Life	5~8 Years

3.Rated Capacity at 25℃ (77° F)

10 hr rate (0.1C, 10.8V)	120Ah
3 hr rate (0.25C, 10.8V)	92.1Ah
1 hr rate (0.55C, 10.5V)	66.3Ah

4.Capacity affected by Temperature (10hour rate)

40℃ (104° F)	103%
25℃ (77° F)	100%
0℃ (32° F)	85%
-15℃ (5° F)	65%

5.Charge Method: constant-voltage charging at 25℃ (77° F)

Cyclic use	14.4~14.9V
Maximum charging current	30A
Temperature Compensation	-30mV/℃
Float Use	13.6~13.8V
Temperature Compensation	-20mV/℃

6.Environment Temperature Requirements

Discharge Temperature	-15~50℃
Charge Temperature	0~40℃
Storage Temperature	-15~40℃



7.Inner Resistance&Max. Discharge Current

A fully charged battery at 25℃ (77° F)	4mΩ
Max. Discharge Current	1800A (5s)
Short Circuit Current	6000A

8.Self-discharge

3% Of the capacity per month at 25℃ (77° F)	
Capacity after 3 month storage	91%
Capacity after 6 month storage	82%
Capacity after 12 month storage	64%

Dimensions (mm)

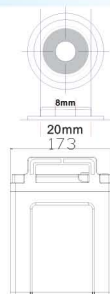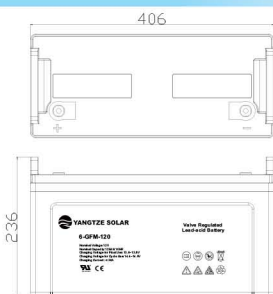

3D Model Review



Constant-current discharge parameter Unit: A (25℃)


F.V/Time	5min	10min	15min	20min	30min	45min	1h	3h	5h	10h	20h
1.80V/cell	275.7	206.3	165.9	135.7	107.7	80.4	63.3	30.7	20.1	12.0	6.24
1.75V/cell	310.8	226.7	181.2	146.0	111.9	83.3	66.3	31.2	20.7	12.1	6.31
1.70V/cell	342.3	247.1	193.5	153.5	116.4	86.7	68.4	32.1	21.2	12.2	6.43
1.65V/cell	377.5	266.7	205.7	163.1	122.8	88.9	70.7	33.5	21.7	12.5	6.51
1.60V/cell	416.3	289.5	220.0	173.7	129.6	92.7	73.2	34.5	22.5	12.6	6.55

Constant-current discharge parameter Unit: W (25℃)


F.V/Time	5min	10min	15min	20min	30min	45min	1h	3h	5h	10h	20h
1.80V/cell	498.7	376.7	305.5	252.1	202.1	153.2	121.6	59.5	39.3	23.7	12.35
1.75V/cell	550.3	407.2	329.5	268.7	208.1	157.5	126.7	60.3	40.3	23.9	12.44
1.70V/cell	589.2	433.7	346.9	280.3	215.5	163.2	130.1	61.9	41.2	24.1	12.68
1.65V/cell	640.5	463.9	366.0	295.5	225.5	165.7	133.6	64.1	42.1	24.5	12.83
1.60V/cell	690.1	492.1	384.9	311.3	236.3	171.9	137.6	65.9	43.3	24.8	12.88

6-GFM-120Ah Valve-regulated Lead Acid Battery Specification


Charge Characteristics for Float Use @ 25°C/77°F

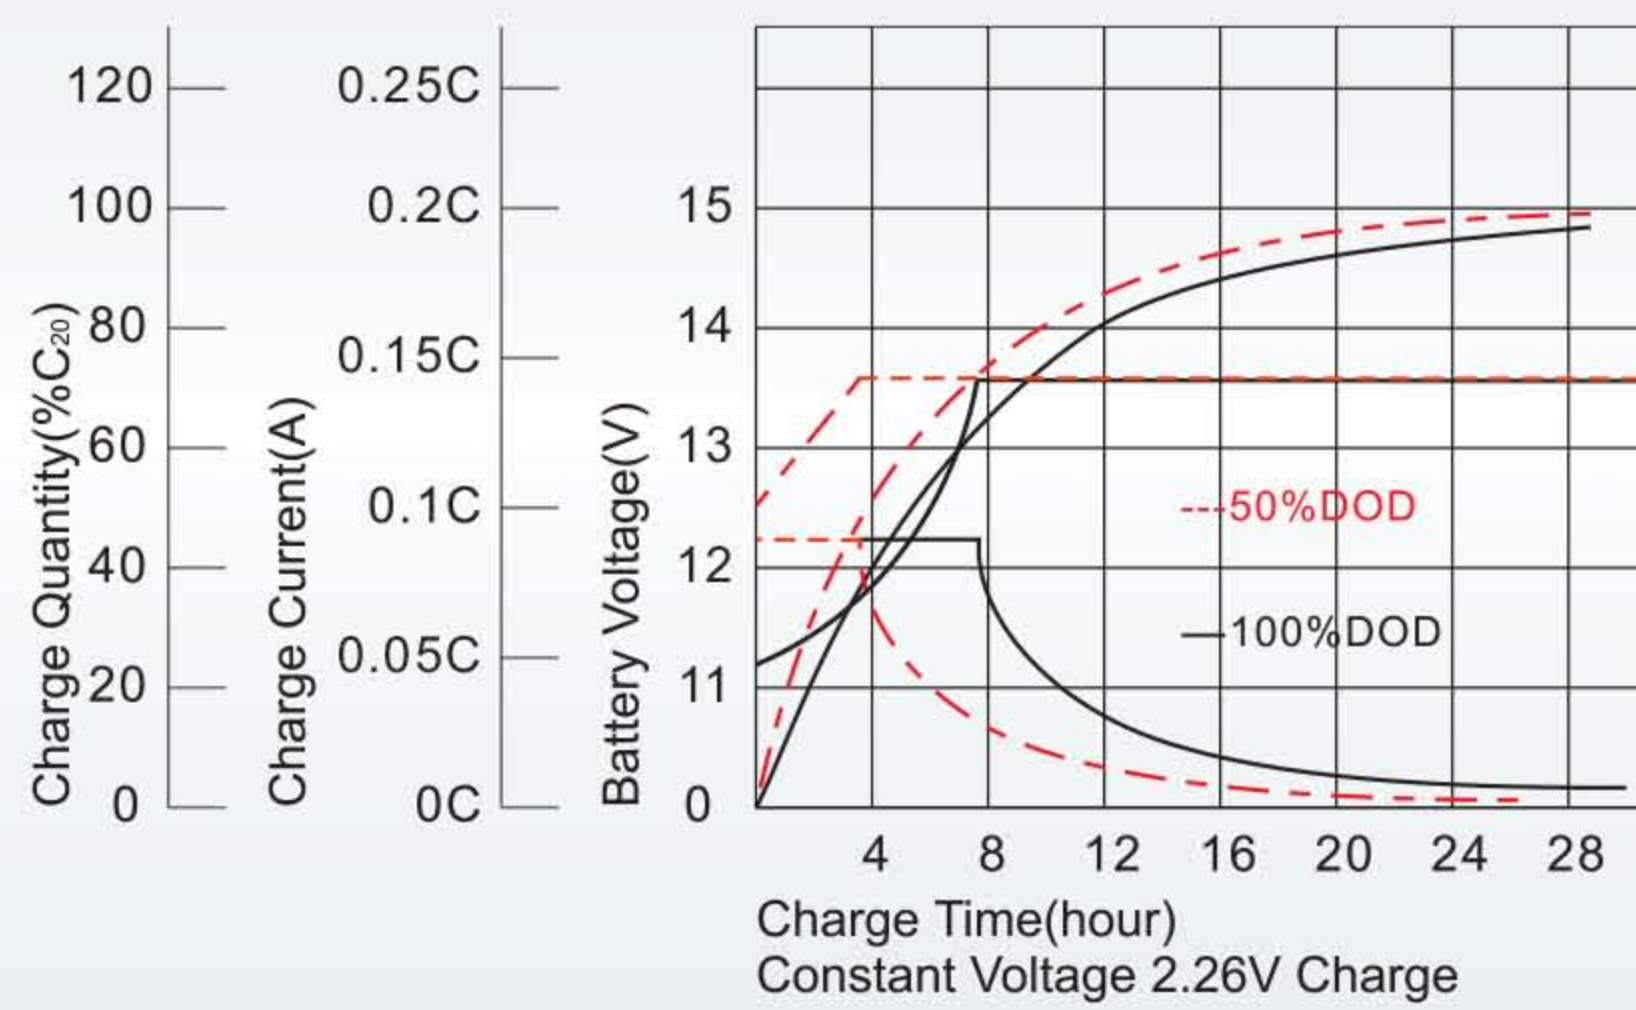


Discharge Characteristics at Various Rates @ 25°C/77°F

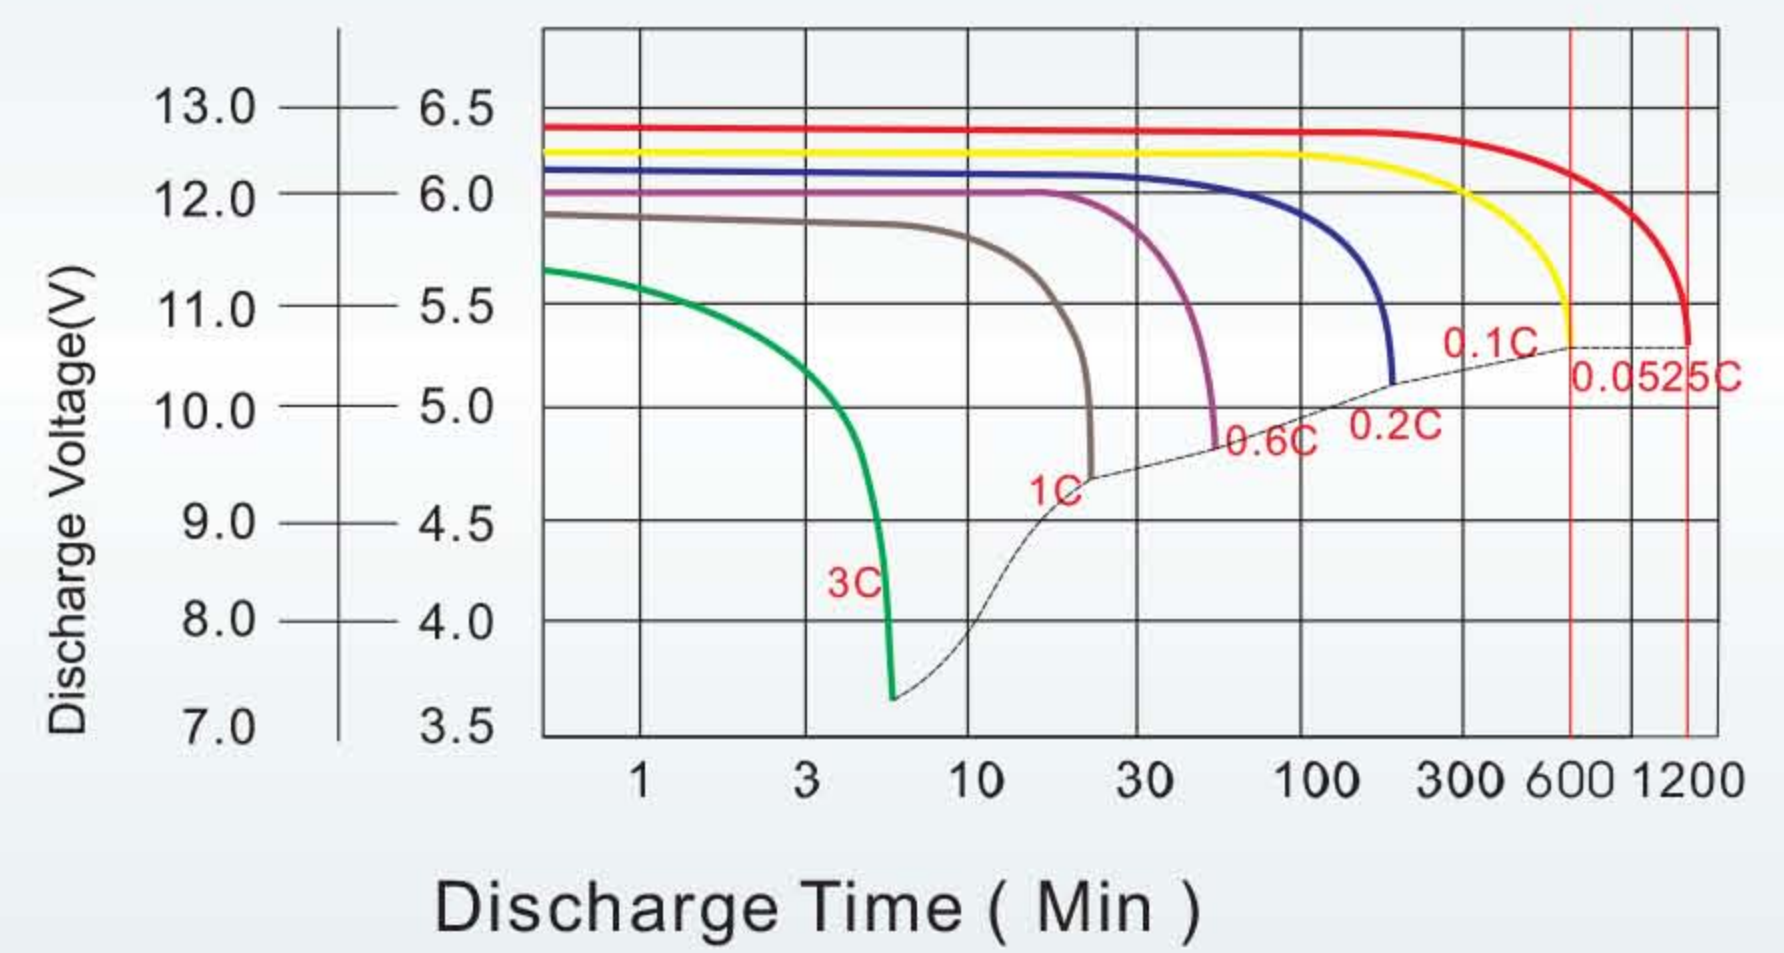


Cycle Life in Relation to Depth of Discharge

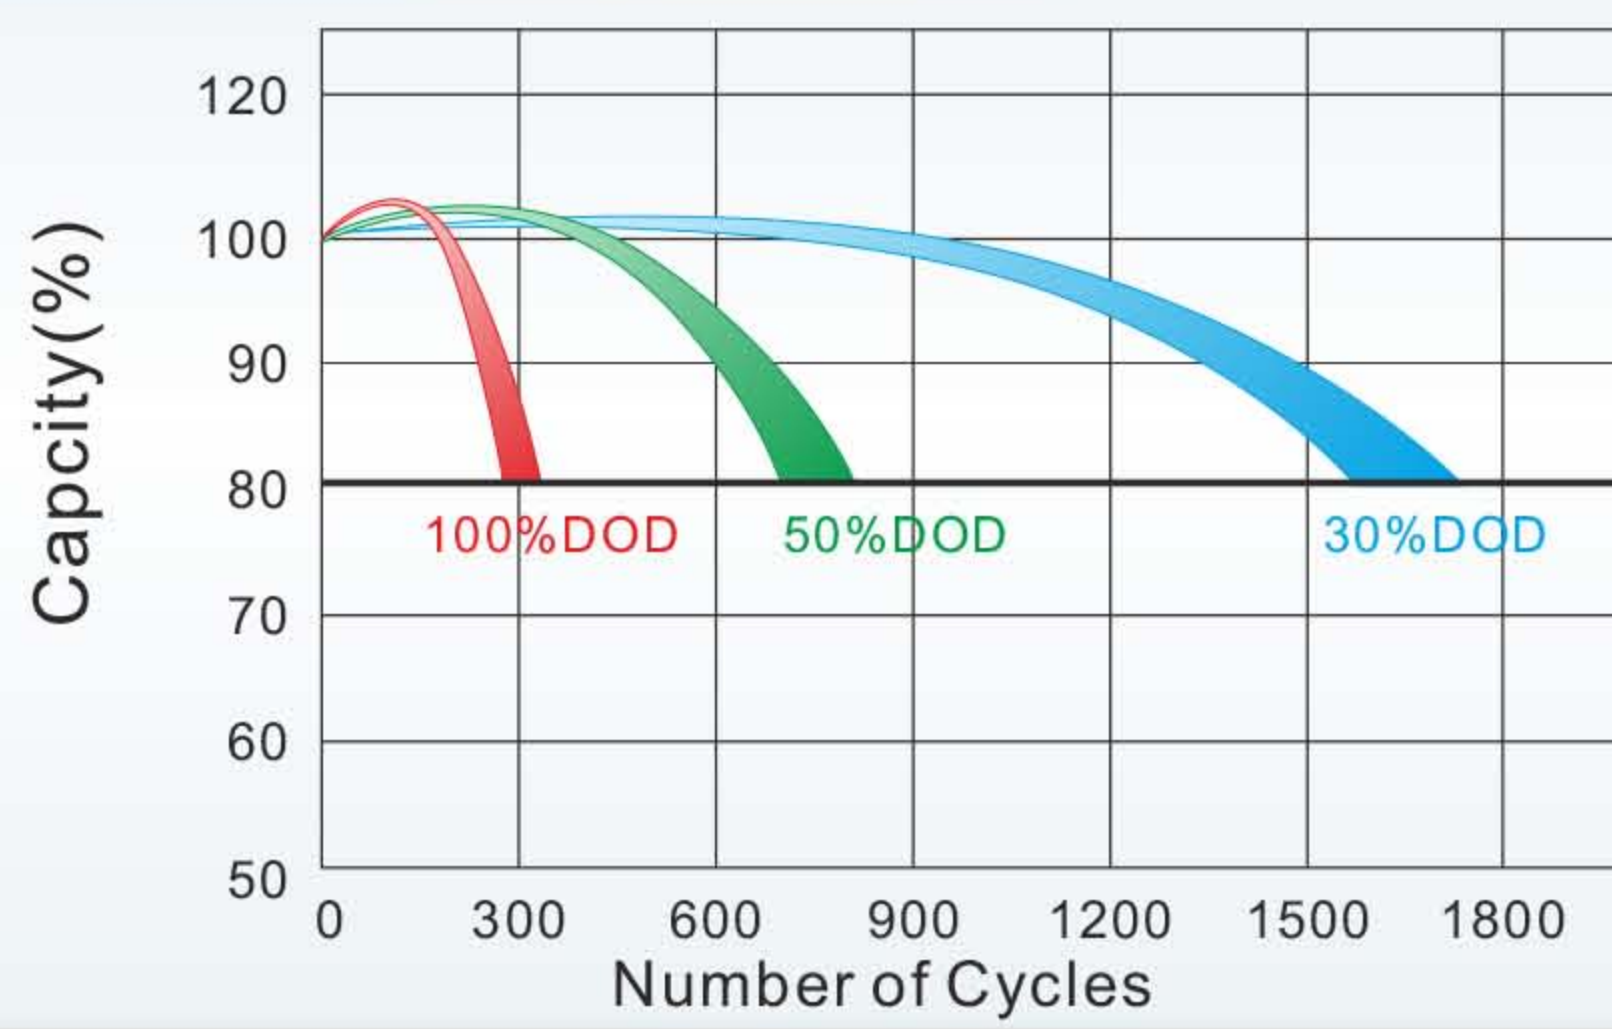


Float Service Life

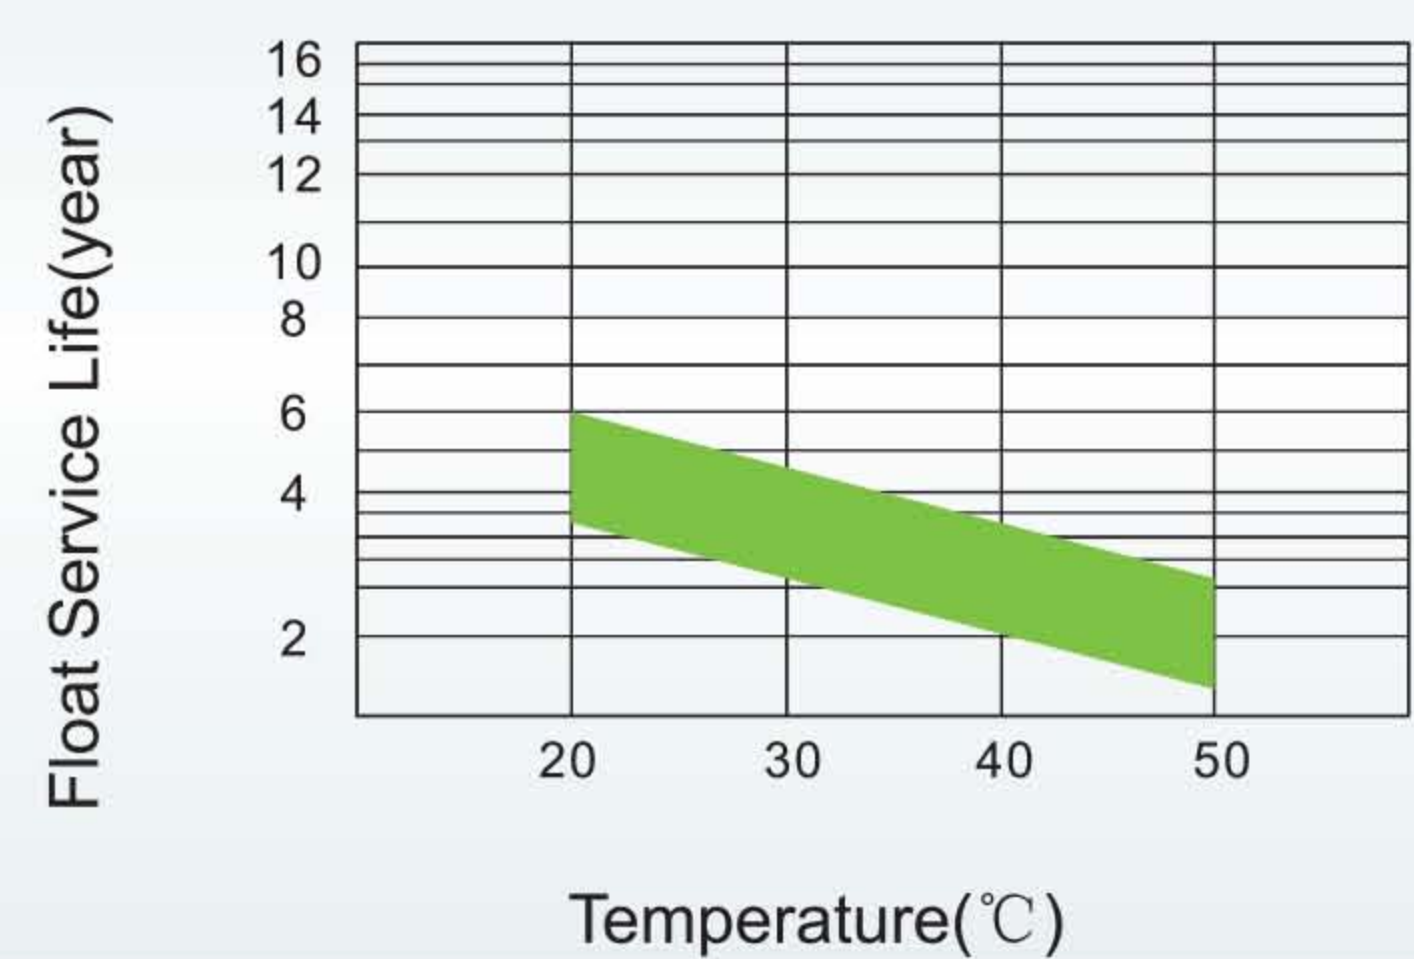

Temperature and Valid Capacity

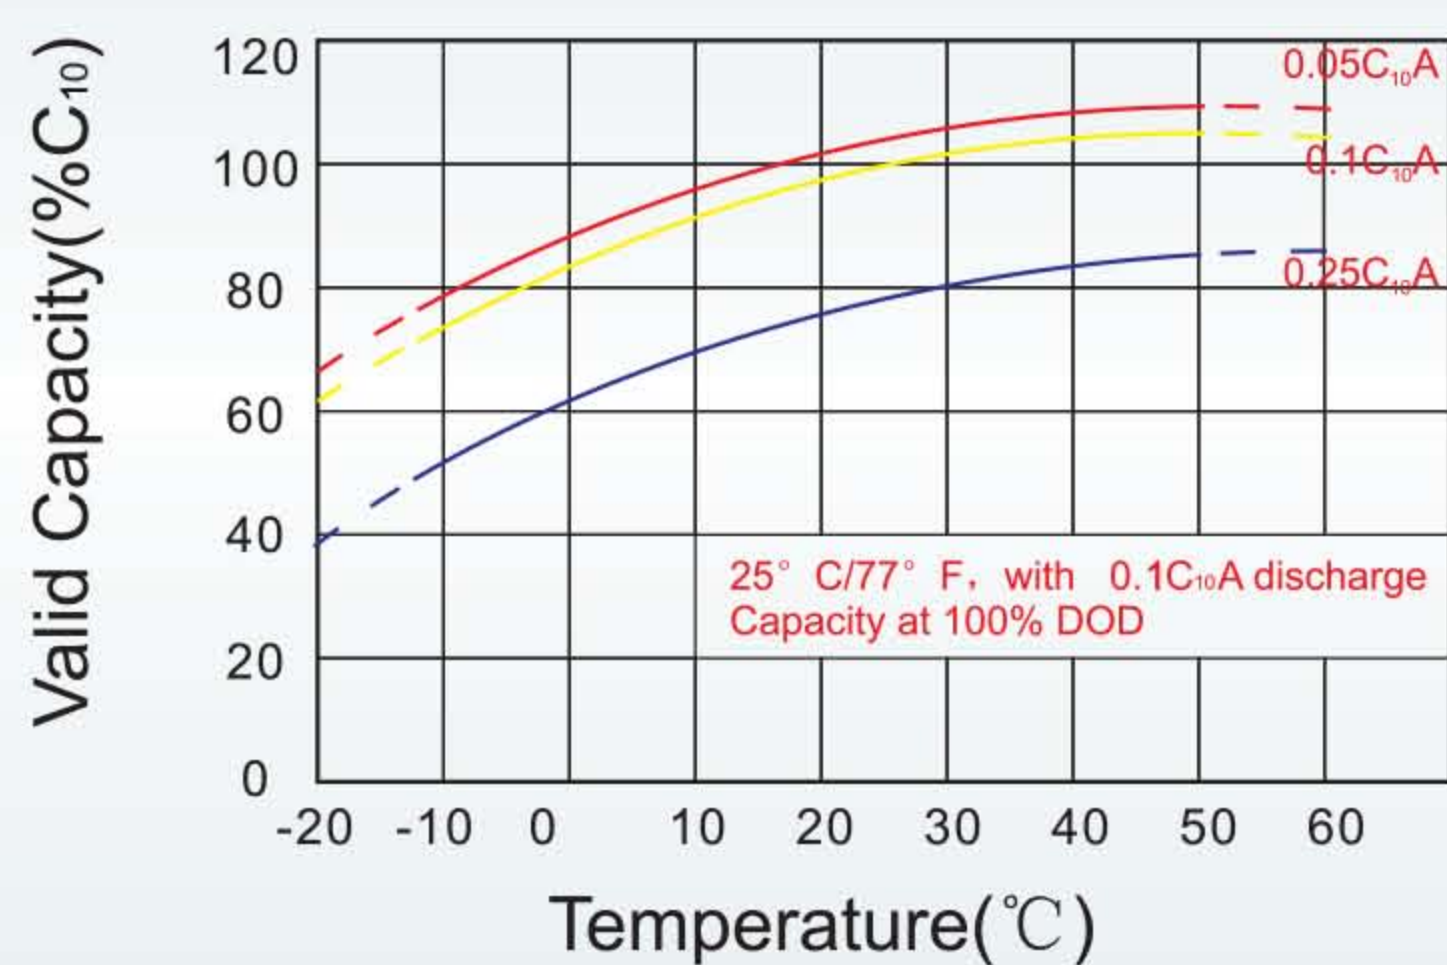

Self Discharge Characteristics

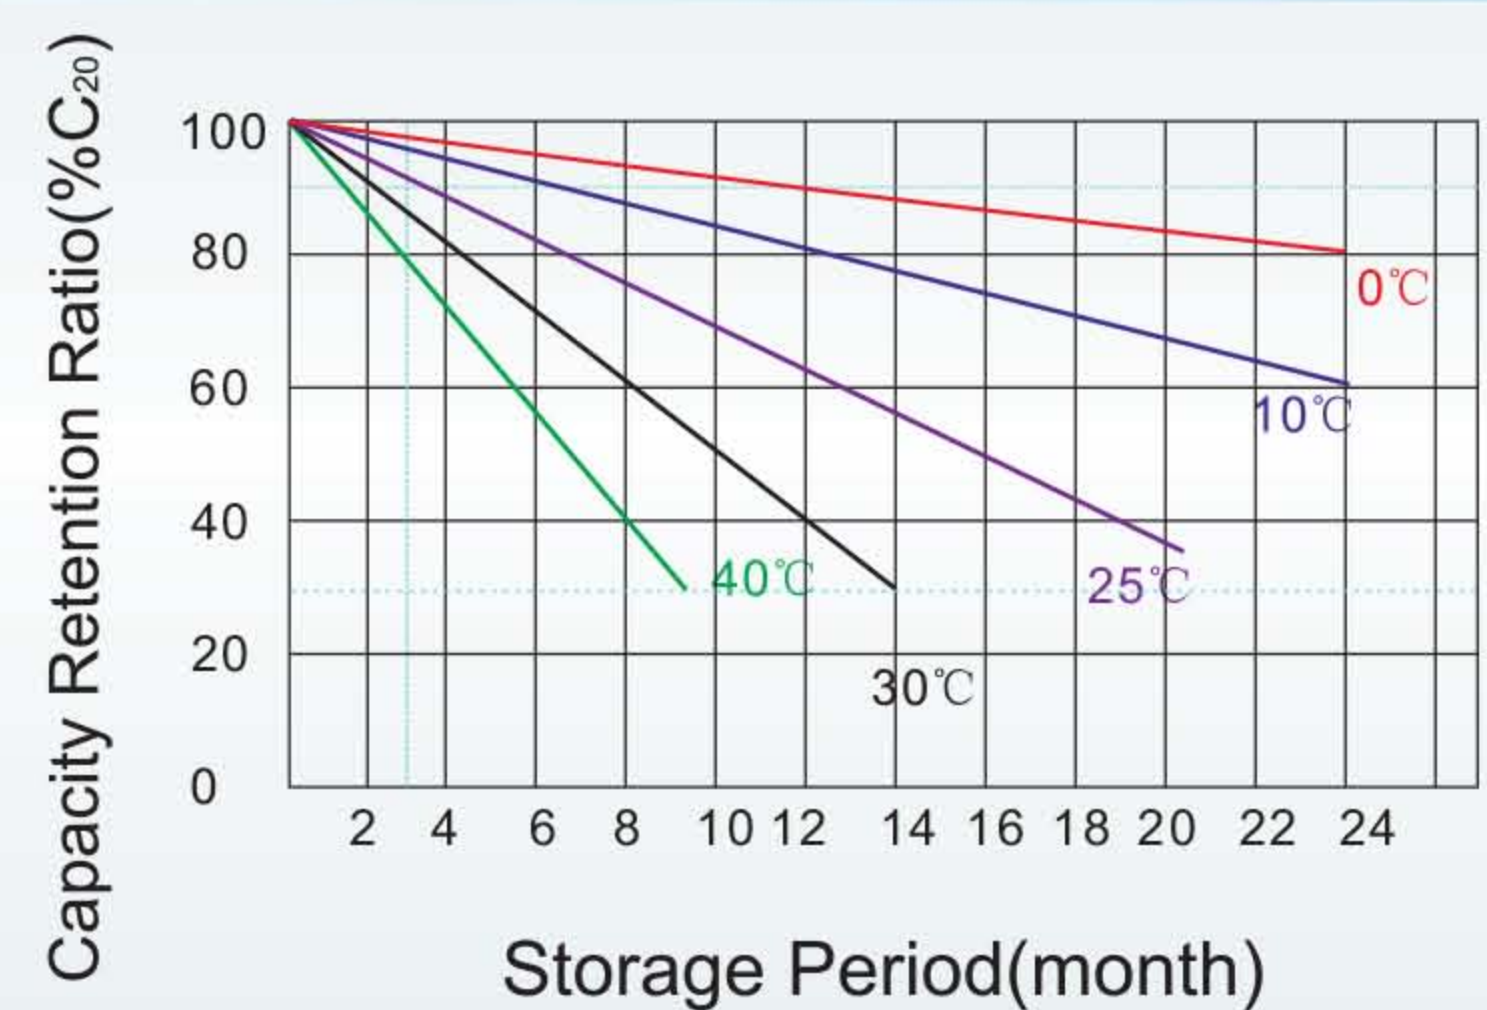

Capacity and Open Circuit Voltage



Relationship between Charging Voltage and Temperature

